


DECO SKY LED HIGH BAY

SYLVANIA

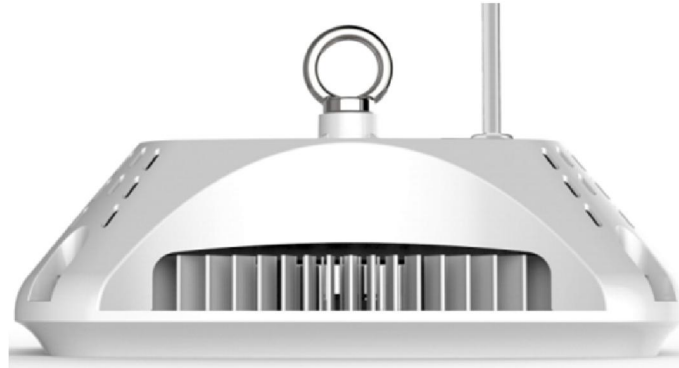

LED Nichia ship inside : LM-79, LM80 available

IES files : available

Certificates : (EMC) TIS 1955-2551, EN 55015:2013, EN 61547:2009, EN 61000-3-2:2014, EN61000-3-3:2013

(CE-LVD) EN60598-2-1:1989, EN60598-1:2015, EN62471:2008, EN62493:2015, EN62031:2008+A1:2013+A2:2015

SPECIFICATION

- High performance SMD design
- Efficacy more than 140lm/W
- Superior temperature stability
- Compact size (383mmx195mm)
- Standard beam angle 120°, 90°, 60° and 80°X130° Asym
- Energy savings
- CRI>70 STD (CRI>80 optional)
- Superior uniformity
- IP 65 Protection rating
- Aluminum alloy body (Black)
- Light weight (4Kg)
- No external reflectors required
- Tempered safety glass diffuser
- Operating range -40° C to 50° C
- Stainless steel screw and hook
- Dimmable optional extra
- Recessed ring optional extra

Part numbers	100LED	120LED	150LED
Out put(lm)	14000	16800	21000
Power(W)	100	120	150
Efficacy(lm/W)	140	140	140
CCT	5,000K 4000K 3000K		
CRI	>80		
Beam angle	120, 90, 60 (80X130 Asym)		
Nichia LED	160	216	272
Input Voltage	100-277Vac 50/60Hz Pf.0.95		
IP. Rating	IP.65		
Weight (Kg)	4		
Life Time (Hrs)	50,000		
Fixture Material	Aluminum		
HID Equivalent	125-150W	150-250W	250-400W

DIMENSION

