




CE RoHS CB




DESCRIPTION

- Patented design combined with many advanced technologies
- Housing made of die casting aluminium can resist impact and corrosion;
- High efficiency light distribution tech, LED lens and structure offers a perfect lighting for road;
- Specially treated tempered glass has better transmissision of light, and no glaring light;
- IP65, Suitable for all weather.

TECHNICAL



Input Voltage	AC100-255 /50-60Hz
Power Factor	>0.9
Color Temp.	3000 - 7000K
Colored Rendering Index	>70
Ambient Temp.	-25 C - 45 C
Lifetime	>50000hrs
IP Ratio	IP65
Pole Installation Diameter	OD 60mm /48mm

Dimension

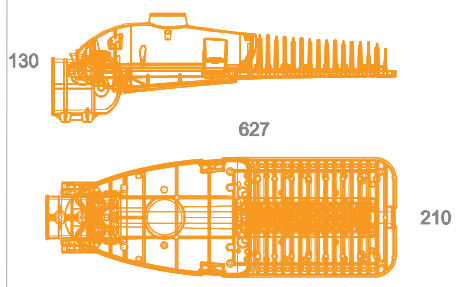

Packing Dimension
627x210 x130 mm

DISTRIBUTION CURVE

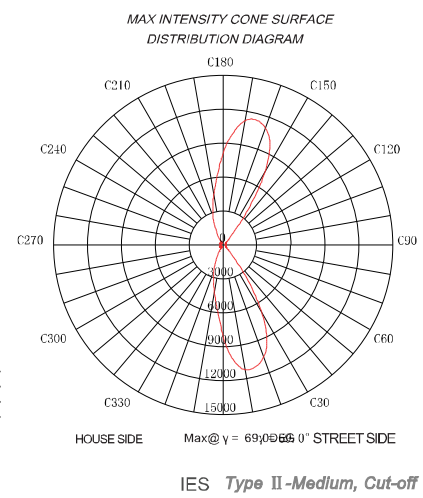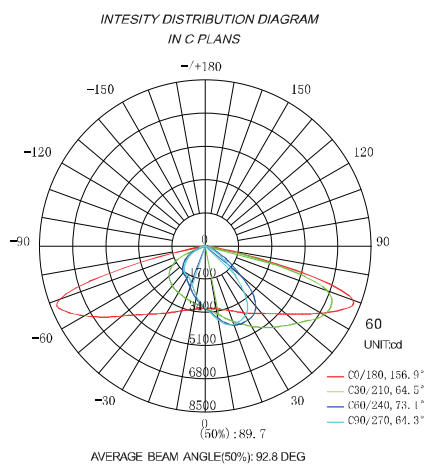

NOVA SLIGHT

LED Power (W)	Luminous Eff (lm/W)	Total Flux (lm)	N.W. (Kg)	G.W. (Kg)	Package (mm)
Nova Slight 100	120	12,000	5.0	5.8	640x230x170
Nova Slight 130	110	14,300	5.2	6.5	640x230x170
Nova Slight 140	110	15,400	5.2	6.5	640x230x170

