



Installation Procedure for Replacement :

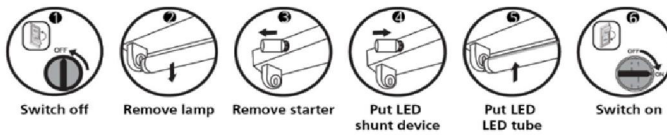

OR

Installation by Connect directly to L-N



Specification Features

- Polycarbonate Tube
- 240° emitting area and 170° beam angle
- Long lifetime : more than 40,000 hrs
- Built-in LED current-control driver
- UV and IR radiation can be avoided
- Mercury-Free
- Easy for installation
- Fixed Cap
- Supply with LED Starter

Application


- Operating temperature : -20°C - +45°C
- Only for indoor application
- Not for use with dimmers

SPECIFICATION

| Description | Voltage | Colour Name | Colour | Watt | Base | Equivalent Watt | Lumen | Beam | Life (h) | Dimmable |
|-----------------------------------|----------|-------------|--------|------|------|-----------------|-------|------|----------|----------|
| RefLED T8 STD 9W 1000 Lm WW V3 | 220-240V | Warmwhite | 830 | 9 | G13 | FL T8 18W | 1000 | 170 | 40000 | No |
| RefLED T8 STD 9W 1050 Lm CW V3 | 220-240V | Coolwhite | 840 | 9 | G13 | FL T8 18W | 1050 | 170 | 40000 | No |
| RefLED T8 STD 9W 1050 Lm DL V3 | 220-240V | Daylight | 865 | 9 | G13 | FL T8 18W | 1050 | 170 | 40000 | No |
| RefLED T8 STD 14.5W 1550 Lm WW V3 | 220-240V | Warmwhite | 830 | 14.5 | G13 | FL T8 36W | 1550 | 170 | 40000 | No |
| RefLED T8 STD 14.5W 1600 Lm CW V3 | 220-240V | Coolwhite | 840 | 14.5 | G13 | FL T8 36W | 1600 | 170 | 40000 | No |
| RefLED T8 STD 14.5W 1600 Lm DL V3 | 220-240V | Daylight | 865 | 14.5 | G13 | FL T8 36W | 1600 | 170 | 40000 | No |
| RefLED T8 STD 18W 2000 Lm WW V3 | 220-240V | Warmwhite | 830 | 18 | G13 | FL T8 36W | 2000 | 170 | 40000 | No |
| RefLED T8 STD 18W 2100 Lm CW V3 | 220-240V | Coolwhite | 840 | 18 | G13 | FL T8 36W | 2100 | 170 | 40000 | No |
| RefLED T8 STD 18W 2100 Lm DL V3 | 220-240V | Daylight | 865 | 18 | G13 | FL T8 36W | 2100 | 170 | 40000 | No |
| RefLED T8 STD 21W 2200 Lm WW V3 | 220-240V | Warmwhite | 830 | 21 | G13 | FL T8 36W | 2200 | 170 | 40000 | No |
| RefLED T8 STD 21W 2300 Lm CW V3 | 220-240V | Coolwhite | 840 | 21 | G13 | FL T8 36W | 2300 | 170 | 40000 | No |
| RefLED T8 STD 21W 2300 Lm DL V3 | 220-240V | Daylight | 865 | 21 | G13 | FL T8 36W | 2300 | 170 | 40000 | No |
| RefLED T8 STD 24W 2600 Lm WW V3 | 220-240V | Warmwhite | 830 | 27 | G13 | FL T8 58W | 2600 | 170 | 40000 | No |
| RefLED T8 STD 24W 2700 Lm CW V3 | 220-240V | Coolwhite | 840 | 27 | G13 | FL T8 58W | 2700 | 170 | 40000 | No |
| RefLED T8 STD 24W 2700 Lm DL V3 | 220-240V | Daylight | 865 | 27 | G13 | FL T8 58W | 2700 | 170 | 40000 | No |

● CRI >80 ● PF ≥0.9 ● THD < 20%

DIMENSION

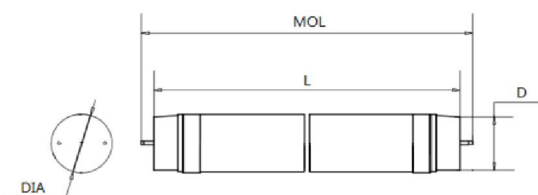

| Watt | D | DIA | L | MOL |
|------|------|------|--------|--------|
| 9 | 26mm | 28mm | 598mm | 602mm |
| 14 | 26mm | 28mm | 1198mm | 1212mm |
| 18 | 26mm | 28mm | 1198mm | 1212mm |
| 21 | 26mm | 28mm | 1198mm | 1212mm |
| 24 | 26mm | 28mm | 1498mm | 1514mm |