Type 3R version without fan

> CONTACT US



FF series exhaust filter and filter fans represents a side-mounted cooling solution with filtered ambient air to maintain optimum ventilation inside the electrical cabinets. Screwless connection, fast tool-free mounting system with clip and maintenance friendliness are the main benefits. Available in a wide range of configurations for both indoor and outdoor use.

Technical data				
echnical data				
APPROVALS				
Approvals	CE; cURus; cULus; UKCA			
IECHANICAL DATA				
Mounting Wall Thickness	1.3-3.2	mm		
	0.05-0.13	in		
GENERIC DATA				
Spare Parts Filter Media	M13FPF			
Casing Material	PBT UL94 5VB			
RAL Number	9005			
Filter Class	G4	EN 779		
Filter Class	ISO coarse 75%	ISO 16890		
Filter Material	thermo-linked progressive structure synthetic fibre			
ENVIRONMENTAL AND THERMAL DATA				
IP Protection Degree	IP55			
Operating Temperature	-30÷60	°C		
	-22÷140	°F		
taraga Tampayati ya	-40÷70	°C		
Storage Temperature	-40÷158	°F		
UL DATA				
UL File Number Recognized Component	E237844			
UL File Number Listed	E500932			
UL Environmental Type Rating	Type 3R			



FF13N53

Type 3R version without fan

> CONTACT US


	Technical data			
	UL Ambient Temperature	60	°C	
		140	°F	




FF13N53

Type 3R version without fan

> CONTACT US

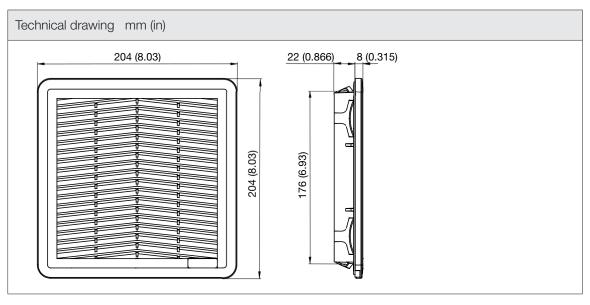

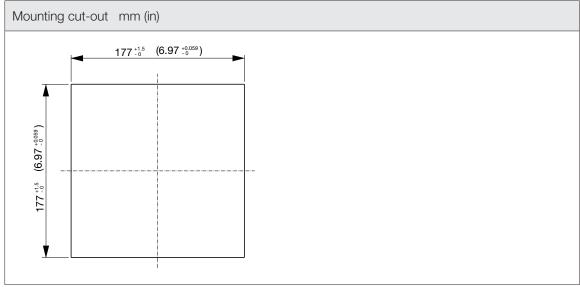



FF13N53

Type 3R version without fan

> CONTACT US

