

FPF08KUG-101

standard without fan

> CONTACT US



FPF series exhaust filter and filter fans represents a side-mounted cooling solution with filtered ambient air to maintain optimum ventilation inside the electrical cabinets. These units have a flat external profile and a quick snap-on fastening system with elastic hooks. Available in different range of sizes, airflow ratings and configurations.

Technical data		
<b>APPROVALS</b>		
Approvals	CE; cURus; UKCA	
<b>MECHANICAL DATA</b>		
Mounting Wall Thickness	1.5-2.2	mm
	0.06-0.09	in
<b>GENERIC DATA</b>		
Spare Parts Filter Media	M08FPF	
RAL Number	7035	
Filter Class	G3	EN 779
Filter Class	ISO coarse 55%	ISO 16890
Filter Material	thermo-linked progressive structure synthetic fibre	
<b>ENVIRONMENTAL AND THERMAL DATA</b>		
IP Protection Degree	IP54	
Operating Temperature	-10÷60	°C
	14÷140	°F
Storage Temperature	-40÷70	°C
	-40÷158	°F
<b>UL DATA</b>		
UL File Number Recognized Component	E237844	
UL Environmental Type Rating	Type 12	
UL Ambient Temperature	60	°C
	140	°F


Image is for illustrative purpose only. All specifications, data and drawing are subject to change without notice. Please refer to our terms of sales including our warranty and limited liabilities clauses.

FPF08KUG-101

standard without fan

> CONTACT US

Technical drawing mm (in)

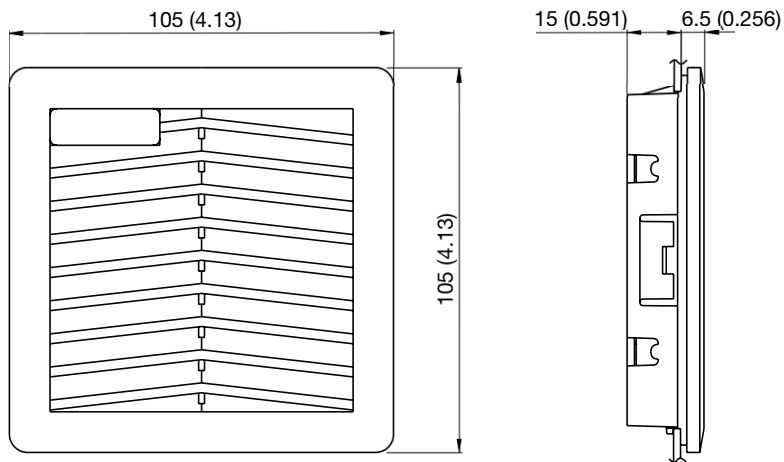

Mounting cut-out mm (in)

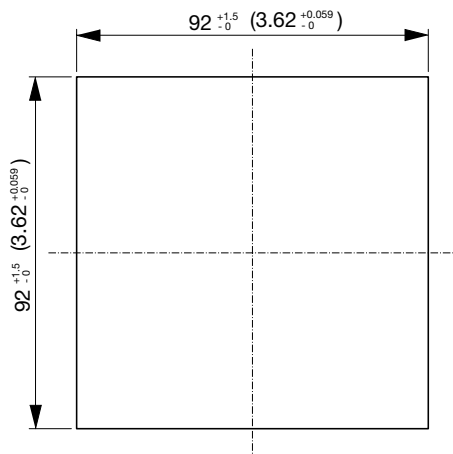


Image is for illustrative purpose only. All specifications, data and drawing are subject to change without notice. Please refer to our terms of sales including our warranty and limited liabilities clauses.

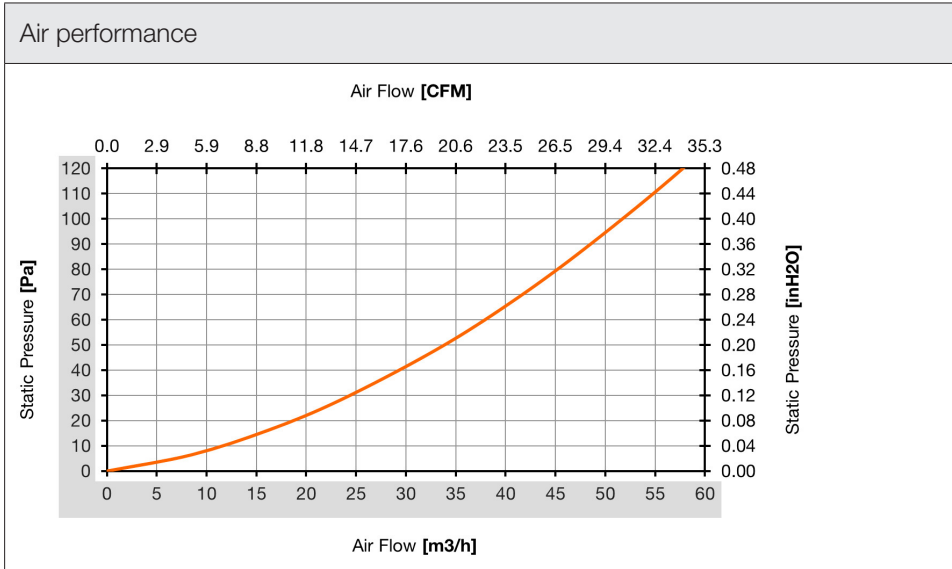


Image is for illustrative purpose only. All specifications, data and drawing are subject to change without notice. Please refer to our terms of sales including our warranty and limited liabilities clauses.