

NetKey® Category 6 U/UTP Copper Cable

PANDUIT®

DATA SHEET

specifications

Category 6 U/UTP copper cable meets ANSI/TIA-568.2-D Category 6 and ISO 11801 Class E channel standards. The conductors are 24 AWG copper insulated with HDPE polymer. The copper conductors are twisted in pairs, separated by a cross divider, and all four pairs are covered by a LSFRZH jacket.



technical information

Electrical performance:	Certified channel performance in a 4-connector configuration up to 100 meters and meets the requirements of ANSI/TIA-568.2-D Category 6 and ISO 11801 Class E channel standards at swept frequencies up to 250 MHz
Conductor/insulator:	24 AWG solid copper insulated with HDPE polymer
Insulation diameter:	0.86-1.22mm (0.034-0.048 in.)
Flame rating:	IEC 60332-1, IEC 60332-3-22, IEC 60754, IEC 61034, EN 50575: Dca-s2,d2,a1
Certification:	ANATEL 2486-09-6246
PoE compliance:	Meets IEEE 802.3af, IEEE 802.3at and IEEE 802.3bt for PoE applications
Installation tension:	110 N (25 lbf) maximum
Temperature rating:	0°C to 50°C (32°F to 122°F) during installation -20°C to 75°C (14°F to 167°F) during operation
Cable jacket:	LSFRZH
Cable diameter:	5.7mm (0.224 in.) nominal
Cable weight:	12 kg/305m (26 lbs./1000 ft.)
Packaging:	305m (1000 ft.) easy-pay-out box Packaged tested to ISTA procedure 1A

key features and benefits

Third party tested	Cable has been tested as part of the NetKey® Category 6 UTP Copper Cabling System by an independent laboratory and complies with the electrical channel requirements of the following standard: ANSI/TIA-568.2-D Category 6 standard
Descending length cable markings	Easy identification of remaining cable reduces installation time and cable scrap
Cross-divider	Separates twisted pairs for robust cable performance
Easy-pay-out box	Ensures proper performance and provides quick installation

applications

Applications include:

- Ethernet 10BASE-T, 100BASE-T (Fast Ethernet), and 1000BASE-T (Gigabit Ethernet)
- 155 Mb/s ATM, 622 Mb/s ATM, 1.2 Gb/s ATM
- Token ring 4/16

NetKey® Copper Cabling System

NetKey® U/UTP Copper Cable

LSFRZH: NUL6C04**-FE


**To designate a color, add suffix BU (Blue), WH (White), YL (Yellow), IG (International Gray), BL (Black), RD (Red), GR (Green), OR (Orange), or VL (Violet).

NetKey® Category 6 U/UTP Copper Cable

additional specifications

Mechanical Test	
Ultimate Breaking Strength	>400 N (90 lbf)
Minimum Bend Radius	4 x cable diameter
Electrical Test	
Nominal Velocity of Propagation (NVP)	65%
Operating Voltage, Maximum	80 V

cable construction

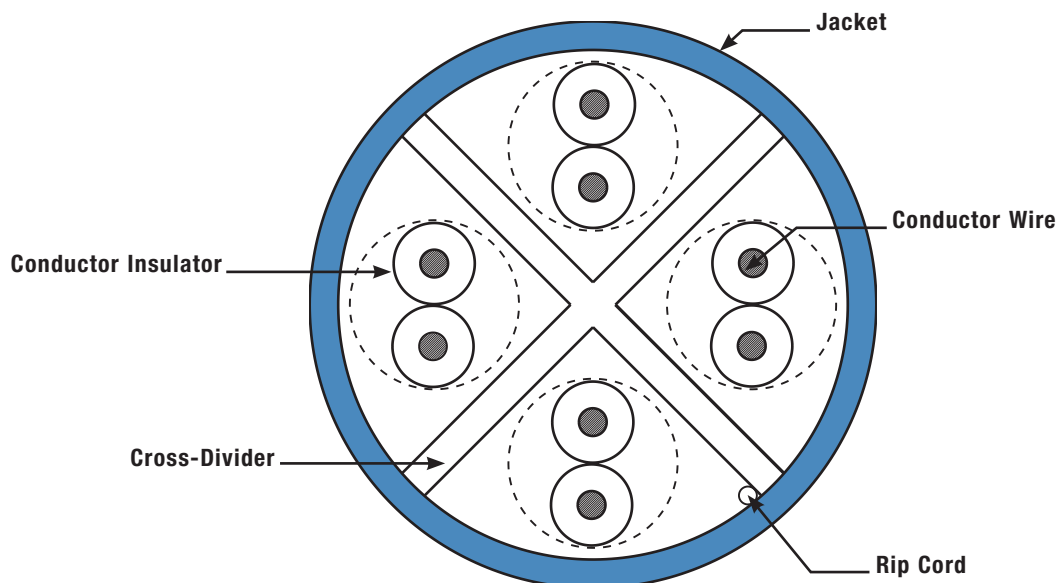

WORLDWIDE SUBSIDIARIES AND SALES OFFICES

PANDUIT US/CANADA
Phone: 800.777.3300

PANDUIT EUROPE LTD.
London, UK
Phone: 44.20.8601.7200

PANDUIT SINGAPORE PTE. LTD.
Republic of Singapore
Phone: 65.6305.7575

PANDUIT JAPAN
Tokyo, Japan
Phone: 81.3.6863.6000

PANDUIT LATIN AMERICA
Guadalajara, Mexico
Phone: 52.33.3777.6000

PANDUIT AUSTRALIA PTY. LTD.
Victoria, Australia
Phone: 61.3.9794.9020

For a copy of Panduit product warranties, log on to www.panduit.com/warranty

PANDUIT®

For more information
Visit us at www.panduit.com
Contact Customer Service by email: cs@panduit.com
or by phone: 800.777.3300

© 2021 Panduit Corp.
ALL RIGHTS RESERVED.
NKDS29--WW-ENG
Replaces WW-NKDS13-ENG
5/2021