


3 x single-core polymeric cables



triplex polymeric cable



TTMT-I

TTMT-E

CRMT shear bolt lugs series (page 170) and CMMT compression lugs series (page 171) available separately

ENEL-approved terminations on page 146

KEY FEATURES

- Reliable under harsh installation conditions
- Ability to cover a wide range of cross sections with a single item
- Reduced storage costs
- Unlimited shelf life

KIT CONTENTS

Kit for three single-core terminations contains:

- Stress control tubes
- Anti-tracking oversheath
- Heat-shrink sheds (in 24 and 36 kV kits and in all outdoor kits)
- Sealing tapes
- Installation instructions

Available on request:

Armoured cables version (add suffix A to reference, e.g. TT070501A)

Aluminium tube screen cables version (add suffix H5 to reference, e.g. TT070501H5)

Rated voltage
 $U_0/U (U_m)$
up to 18/30 (36) kV

Cable formation
3 ×

Suitable for:
1-core or triplex polymeric-insulated cables (PVC, EPR, PE, XLPE) with wire or tape screen.

H5 version suitable also for aluminium tube screen

Compliance
CENELEC HD 629.1 S2



watch
video

	Rated voltage U_0/U (kV)	voltage class U_m	ref.	item	conductor cross-section range min-max (mm ²)	termination length (mm)	* Recommended Cu/Al shear bolt lug CRMT series
	TTMT-I 3 × indoor single-core						
	3.6/6	7.2 kV	TT070501	TTMT-7/50-I	16 – 50	300	CRMT 25/95
			TT071201	TTMT-7/120-I	70 – 120		CRMT 35/150
			TT072401	TTMT-7/240-I	150 – 240		CRMT 95/240
			TT075001	TTMT-7/500-I	300 – 500		CRMT 185/400
			TT079991	TTMT-7/1000-I	630 – 1000		-
	6/10	12 kV	TT170251	TTMT-17/25-I	16 – 25	370	CRMT 25/95
			TT170701	TTMT-17/70-I	35 – 70		CRMT 25/95
			TT172401	TTMT-17/240-I	95 – 240		CRMT 95/240
			TT174001	TTMT-17/400-I	300 – 400		CRMT 185/400
			TT178001	TTMT-17/800-I	500 – 800		-
	12/20	24 kV	TT240701	TTMT-24/70-I	25 – 70	450	CRMT 25/95
			TT242401	TTMT-24/240-I	95 – 240		CRMT 95/240
			TT244001	TTMT-24/400-I	300 – 400		CRMT 185/400
			TT248001	TTMT-24/800-I	500 – 800		-
18/30	36 kV	TT360951	TTMT-36/95-I	35 – 95	520	CRMT 25/95	
		TT361851	TTMT-36/185-I	120 – 185		CRMT 95/240	
		TT365001	TTMT-36/500-I	240 – 500		CRMT 185/400	

	TTMT-E 3 × outdoor single-core						
	8.7/15	17.5 kV	TT170252	TTMT-17/25-E	16 – 25	450	CRMT 25/95
			TT170702	TTMT-17/70-E	35 – 70		CRMT 25/95
			TT172402	TTMT-17/240-E	95 – 240		CRMT 95/240
			TT174002	TTMT-17/400-E	300 – 400		CRMT 185/400
			TT178002	TTMT-17/800-E	500 – 800		-
	12/20	24 kV	TT240702	TTMT-24/70-E	25 – 70	520	CRMT 25/95
			TT242402	TTMT-24/240-E	95 – 240		CRMT 95/240
			TT244002	TTMT-24/400-E	300 – 400		CRMT 185/400
			TT248002	TTMT-24/800-E	500 – 800		-
	18/30	36 kV	TT360952	TTMT-36/95-E	50 – 95	720	CRMT 25/95
			TT361852	TTMT-36/185-E	120 – 185		CRMT 95/240
			TT365002	TTMT-36/500-E	240 – 500		CRMT 185/400


NOTES

- * CRMT series shear bolt lug (page 170) and CMMT series compression lugs (page 171) available separately
- TTMT packaging: 3 single-core termination - minimum and multiple ord.qty 1 pack

MEDIUM VOLTAGE

TTMT-3

Medium Voltage Heat shrink terminations for **three-core** polymeric cables up to 36 kV



three-core
polymeric cable



TTMT-3I



TTMT-3E

MEDIUM VOLTAGE

CRMT shear bolt lugs (page 170)
and CMMT compression lugs
(page 171) available separately

KEY FEATURES

- Reliable under harsh installation conditions
- Ability to cover a wide range of cross sections with a single item
- Reduced storage costs
- Unlimited shelf life

KIT CONTENTS

One three-core termination kit, contains

- Stress control tubes
- Anti-tracking oversheath
- Heat-shrink sheds
- Sealing tapes
- Installation instructions

Available on request:

Armoured cables version (add suffix **A** to reference, e.g. TT070503A)

Rated voltage
 U_0/U_m
up to 18/30 (36) kV

Cable formation
1 ×

Suitable for:
1-core or triplex
polymeric-insulated cables
(PVC, EPR, PE, XLPE)
with wire or tape screen


Compliance
CENELEC HD 629.1 S2


TTMT-3

Medium Voltage Heat shrink terminations for **three-core** polymeric cables up to 36 kV



watch
video

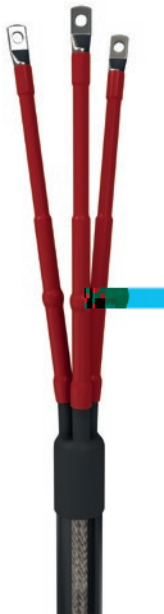	Rated voltage U_0/U (kV)	voltage class U_m	ref.	item	conductor cross-section range min-max (mm ²)	termination length (mm)	* Recommended Cu/Al shear bolt lug CRMT series
TTMT-3I 1 × indoor three-cores							
	3.6/6	7.2 kV	TT070503	TTMT-7/50-3I	16 – 50	450	CRMT 25/95
			TT071203	TTMT-7/120-3I	70 – 120		CRMT 35/150
			TT072403	TTMT-7/240-3I	150 – 240		CRMT 95/240
			TT075003	TTMT-7/500-3I	300 – 500		CRMT 185/400
			TT079993	TTMT-7/1000-3I	630 – 1000		-
	8.7/15	17.5 kV	TT170253	TTMT-17/25-3I	16 – 25	520	CRMT 25/95
			TT170703	TTMT-17/70-3I	35 – 70		CRMT 25/95
			TT172403	TTMT-17/240-3I	95 – 240		CRMT 95/240
			TT174003	TTMT-17/400-3I	300 – 400		CRMT 185/400
	12/20	24 kV	TT178003	TTMT-17/800-3I	400 – 800	520	-
TT240703			TTMT-24/70-3I	25 – 70	CRMT 25/95		
TT242403			TTMT-24/240-3I	95 – 240	CRMT 95/240		
TT244003			TTMT-24/400-3I	300 – 400	CRMT 185/400		
18/30	36 kV	TT360953	TTMT-36/95-3I	35 – 95	720	CRMT 25/95	
		TT361853	TTMT-36/185-3I	120 – 185		CRMT 95/240	
		TT365003	TTMT-36/500-3I	240 – 500		CRMT 185/400	

TTMT-3E 1 × outdoor three-cores							
	8.7/15	17.5 kV	TT170256	TTMT-17/25-3E	16 – 25	720	CRMT 25/95
			TT170706	TTMT-17/70-3E	35 – 70		CRMT 25/95
			TT172406	TTMT-17/240-3E	95 – 240		CRMT 95/240
			TT174006	TTMT-17/400-3E	300 – 400		CRMT 185/400
			TT178006	TTMT-17/800-3E	500 – 800		-
	12/20	24 kV	TT240706	TTMT-24/70-3E	25 – 70	900	CRMT 25/95
			TT242406	TTMT-24/240-3E	95 – 240		CRMT 95/240
			TT244006	TTMT-24/400-3E	300 – 400		CRMT 185/400
	18/30	36 kV	TT360956	TTMT-36/95-3E	50 – 95	900	CRMT 25/95
			TT361856	TTMT-36/185-3E	120 – 185		CRMT 95/240
TT365006			TTMT-36/500-3E	240 – 500	CRMT 185/400		

NOTE * CRMT series shear bolt lug (page 170) and CMMT series compression lugs (page 171) available separately
• TTMT-3 packaging: 1 three-core termination - minimum and multiple ord.qty 1 pack