CCU05A231WNIUX

indoor

> CONTACT US



The CCU series wall-mounted cooling units represent an ideal solution for cooling electrical panels in high external temperatures, isolating them from the surrounding environment. The range of cooling units meets different indoor and outdoor application needs, ensuring high technical and safety standards. In all models, the polyurethane gasket is laid by machine, significantly reducing installation times.

Technical data		
APPROVALS		
Approvals	CE; UKCA	
PERFORMANCE		
Cooling Consoity I 251 25	525/575	W
Cooling Capacity L35L35	1791/1962	BTU/hr
Cooling Consoity I 251 50	425/445	W
Cooling Capacity L35L50	1450/1518	BTU/hr
ELECTRICAL DATA		
Rated Voltage	230	V a.c.
Rated Current	2/2.2	А
Rated Power L35L35	275/325	W
Rated Power L35L50	315/385	W
Frequency	50/60	Hz
Max Current	11	А
Fuse T	4	А
GENERIC DATA		
Casing Material	Painted Steel	
RAL Number	7035	
Electrical Connection	Connector	
Refrigerant Number	R134a	
Refrigerant Charge	220	g
Maximum Allowable Pressure	HP 2.4/LP 0.6	MPa



COOLING UNITS Wall Mounting



CLIMATE CONTROL SYSTEMS

CCU05A231WNIUX

indoor

> CONTACT US


Technical data		
ENVIRONMENTAL AND THERMAL DATA		
Protection Degree Internal Circuit	IP54	
On anation Towns and the	20÷50	°C
Operating Temperature	68÷122	°F



CCU05A231WNIUX

indoor

> CONTACT US

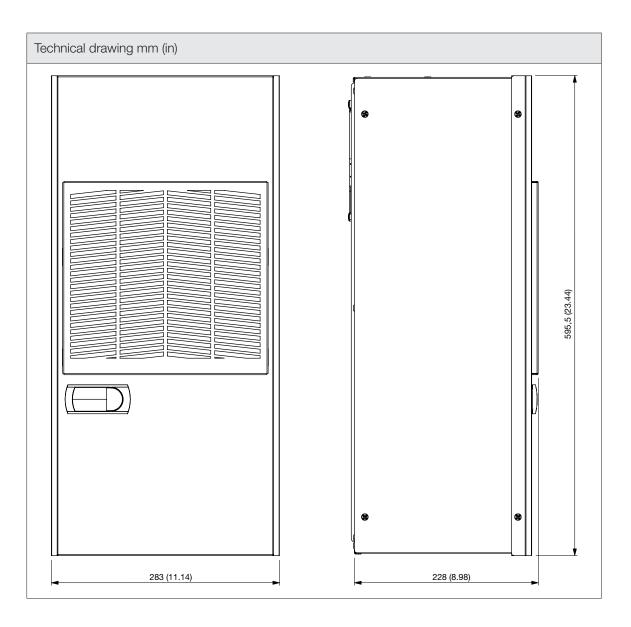



CCU05A231WNIUX

indoor

> CONTACT US

