CCU08A231WNIUX

indoor

> CONTACT US



The CCU series wall-mounted cooling units represent an ideal solution for cooling electrical panels in high external temperatures, isolating them from the surrounding environment. The range of cooling units meets different indoor and outdoor application needs, ensuring high technical and safety standards. In all models, the polyurethane gasket is laid by machine, significantly reducing installation times.

Technical data		
APPROVALS		
Approvals	CE; UKCA	
PERFORMANCE		
Cooling Capacity L35L35	855/935	W
	2917/3190	BTU/hr
Cooling Capacity L35L50	685/715	W
	2337/2440	BTU/hr
ELECTRICAL DATA		
Rated Voltage	230	V a.c.
Rated Current	2.9/3.2	A
Rated Power L35L35	395/455	W
Rated Power L35L50	445/535	W
Frequency	50/60	Hz
Max Current	17	А
Fuse T	4	А
GENERIC DATA		
Casing Material	Painted Steel	
RAL Number	7035	
Electrical Connection	Connector	
Refrigerant Number	R134a	
Refrigerant Charge	230	g
Maximum Allowable Pressure	HP 2.4/LP 0.6	MPa



COOLING UNITS Wall Mounting



CCU08A231WNIUX

indoor

> CONTACT US


Technical data		
ENVIRONMENTAL AND THERMAL DATA		
Protection Degree Internal Circuit	IP54	
OtiTti	20÷50	°C
Operating Temperature	68÷122	°F



CCU08A231WNIUX

indoor

> CONTACT US

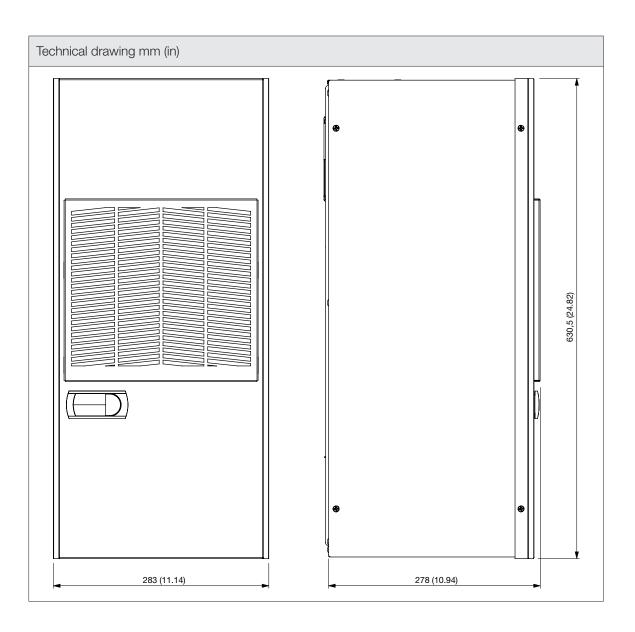



CCU08A231WNIUX

indoor

> CONTACT US

