FF15U5

IP55 version without fan

 $> \ensuremath{\mathsf{CONTACT}}\xspace$ US



FF series exhaust filter and filter fans represents a side-mounted cooling solution with filtered ambient air to maintain optimum ventilation inside the electrical cabinets. Screwless connection, fast tool-free mounting system with clip and maintenance friendliness are the main benefits. Available in a wide range of configurations for both indoor and outdoor use.

Technical data			
APPROVALS			
Approvals	CE; cURus; cULus; cCSAus; UKCA		
MECHANICAL DATA			
Mounting Wall Thickness	1.3-3.7	mm	
	0.05-0.15	in	
GENERIC DATA			
Spare Parts Filter Media	M15FPF		
Casing Material	PC/ABS UL94 V-0		
RAL Number	7035		
Filter Class	G4	EN 779	
Filter Class	ISO coarse 75%	ISO 16890	
Filter Material	thermo-linked progressive structure synthetic fibre		
ENVIRONMENTAL AND THERMAL DATA			
IP Protection Degree	IP55		
Operating Temperature	-30÷60	°C	
	-22÷140	°F	
Storage Temperature	-40÷70	°C	
	-40÷158	°F	
UL DATA			
UL File Number Recognized Component	E237844		
UL File Number Listed	E500932		
UL Environmental Type Rating	Type 12		



IP55 version without fan

 $> \ensuremath{\mathsf{CONTACT}}\xspace$ US

Technical data		
UL Surrounding Temperature	60	°C
	140	°F




virdis

FF15U5

IP55 version without fan

 $> \ensuremath{\mathsf{CONTACT}}\xspace$ US

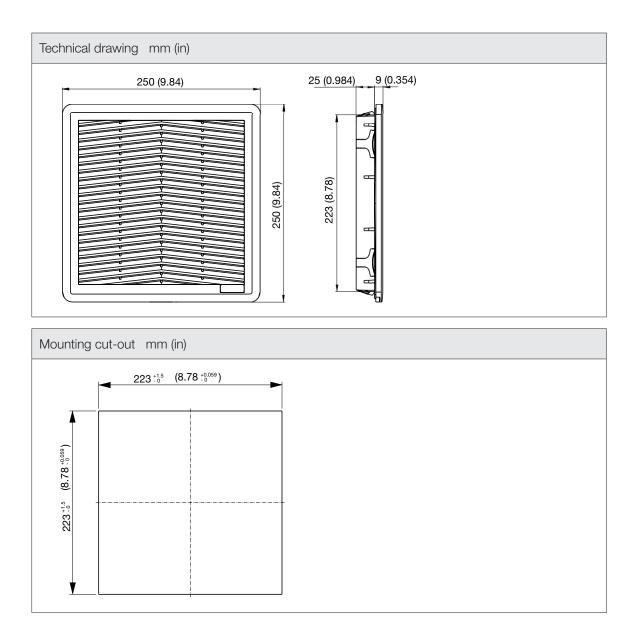



virdis

FF15U5

IP55 version without fan

 $> \ensuremath{\mathsf{CONTACT}}\xspace$ US

