




Ready to use ONE GEL® is already cross-linked and supplied in cartridges for common silicone guns, for a fast and waste-free application

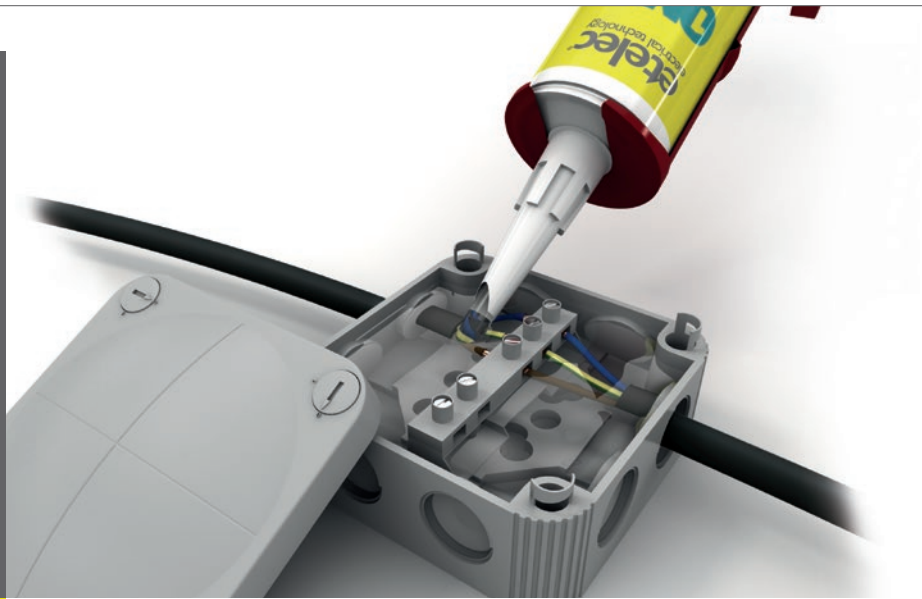

APPLICATIONS

- Filling of junction boxes
- Insulation of electrical connections
- Insulation of electronic boards and components
- **Designed for applications with hard-to-reach enclosures or connections**
- **Best suited for vertical or upended applications**
- Suitable for use in civil and industrial applications



ref.	item	volume (liters)	min. /mult. ordin. (pcs)	watch video
ONEGEL	ONE GEL	0,3	24	

Dielectric strength
25 kV/mm

Colour
clear blue

Operating temperature range
-60 °C / +200 °C

Resistivity (IEC 60093)
10 GΩ/mm

Penetration (ISO 2137)
300 mm / cono da 100 g

Density (ISO 3219)
0,97 kg/l

Volume reduction
< 0,01%



READY TO USE
No component to be mixed



Vertical application



Excellent electrical insulation



High moisture protection



Re-enterable and removable



Unlimited shelf life



Non-irritant



Odourless and solvent-free



Compliant to EU Directive 2015/863 (RoHS 3)



Halogen free



Eco-friendly



Non-hazardous EU Reg. no. 1272/2008 (CLP)