GF15KU230BER

standard with fan

virdis



GF series exhaust filter and filter fans represents a side-mounted cooling solution with filtered ambient air to maintain optimum ventilation inside the electrical cabinets. Characterized by a mounting system with jacks for thick wall application (up to 8mm extensible up to 16mm by cutting the jacks) in both plate and plastic enclosures, and a hinged opening for a filter media replacement in seconds.

Technical data		
APPROVALS		
Approvals	CE; UKCA	
PERFORMANCE		
Max Airflow	245/285	m³/h
	144/168	CFM
Airflow with Exhaust Filter	160/185	m³/h
	94/109	CFM
	158/202	Pa
Max Static Pressure	0.63/0.81	in H2O
ELECTRICAL DATA		
Rated Voltage	230	V a.c.
Rated Current	0.14/0.15	A
Rated Power	32/35	W
Operating Voltage	207-253	V a.c.
Frequency	50/60	Hz
Appliance Class	1	
Motor Protection	Thermally Protected	
MECHANICAL DATA		
Mounting Wall Thickness	1-8	mm
	0.04-0.31	in
GENERIC DATA		
RAL Number	7035	




virdis

GF15KU230BER

	S
	\geq
	Ш
	S
	>
US	S
	Z
	0 N
	_
	АT
	4
	\equiv
	\vdash
	Z
	ш
	>

Technical data				
Life Expectancy	40000	h at 40 °C		
	40000	h at 104 °F		
Airflow Direction	Reverse			
Electrical Connection	Terminal Block			
Wires Section	1-2.5	mm²		
Wires Section	16-14	AWG		
Fan Noise	50/55	dB(A)		
Filter Class	G3	EN 779		
Filter Class	ISO coarse 55%	ISO 16890		
Filter Material	thermo-linked progressive structure synthetic fibre			
ENVIRONMENTAL AND THERMAL DATA				
IP Protection Degree	IP54			
Operating Temperature	-10÷50	°C		
	14÷122	°F		
Storage Temperature	-40÷70	°C		
	-40÷158	°F		



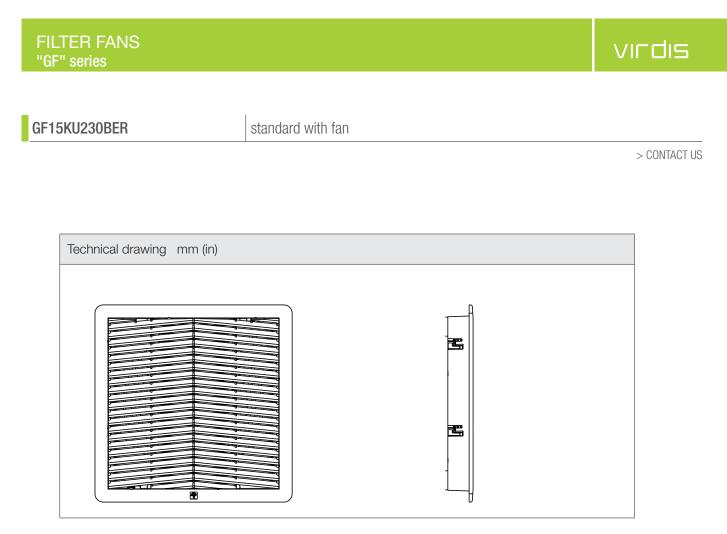



virdis

GF15KU230BER

standard with fan

 $> \ensuremath{\mathsf{CONTACT}}\xspace$ US

